

User Manual

Date

04/21/2021/

Version 1.0.0

PGP - 101



Kontakt

digitalSIGNAGE,de GmbH
Edisonstraße 20
24145 Kiel

office@digitalsignage.de
<https://www.iadea.info/>

This printed quick guide provides a quick walkthrough of the set up process.

Technical Spec

| Parts | Description |
|-----------------------------|---|
| Net Weight (g) | 273 |
| Dimension (mm) | |
| Gang box plate | 115 x 131 x 11 |
| VESA adapter plate | 115 x 133.4 x 2 |
| Screw types | M3 x 6L x 4pcs M4 x 8L x 4pcs |
| Material | Metal |
| Compatible IAdea Signboards | XDS-1078 XDS-1088 series XDS-1588 series WRP-1000 series |

Package content



VESA adapter
plate
1 pc



Gang box
plate
1 pc



Screw
M3 x 6L
4 pcs




Screw
M4 x 8L
4 pcs

Mounting installation

1. Mounting gang box plate


Mount the gang box plate to the gang box holes. Please check it is US or EU/international types.

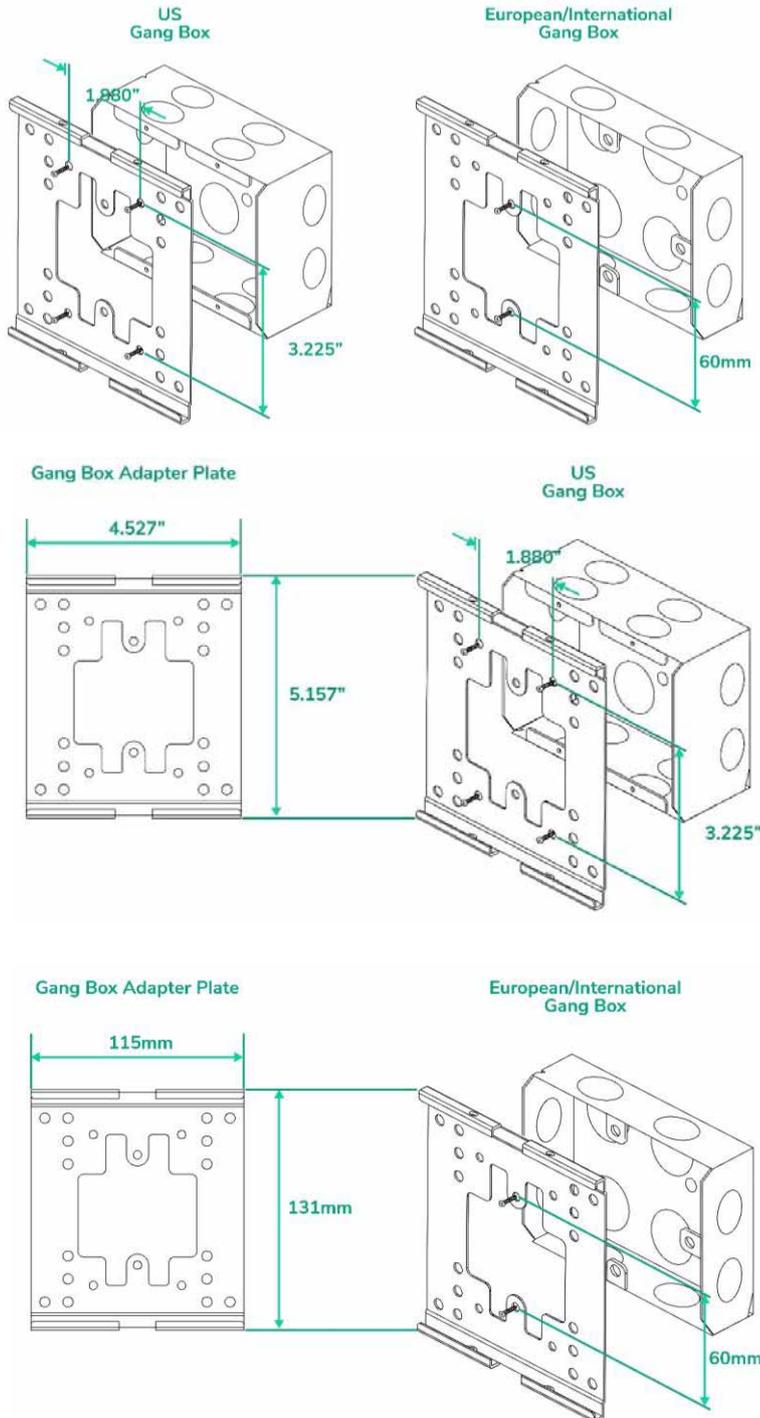

2. Mounting VESA adapter plate

Mount the VESA adapter plate to IAdea signboards. For 10" models, please mount to 75 x 75 holes. 15" models, please mount to 100 x 100 holes.

Device Vesa Mount Plate

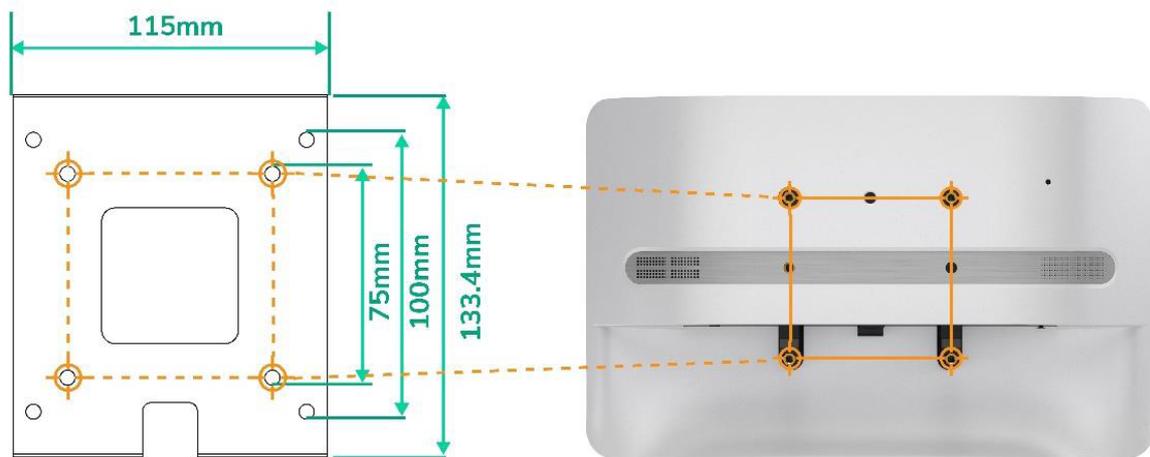

3. Cabling and assembling the set

Pull out the cables (Ethernet cable, power cables) from the gang box and plug to IAdea signboards. Slide the VESA adapter plate to the gang box plate. Then put on 4 screws on top and bottom to fix the plates.

