



XMP-6250

XMP-6250 is a must-have media player for anyone in the business of professional audio-visual, digital signage and venue installations - mainstream and ready to go!



Rugged Device



Wide Temperature



Digital/Analog Audio



Robust 8GB eMMC Storage



Content Rotation



Support Touch



Less CO2 Emission



1080p

Amazing Quality




Superior Utility



Dynamic Content


Effortless Setup

Setting up the XMP-6250 couldn't be easier. Simply power up the device and you are ready to go. Previous technology experience is not necessary, which reduces overall set-up costs.

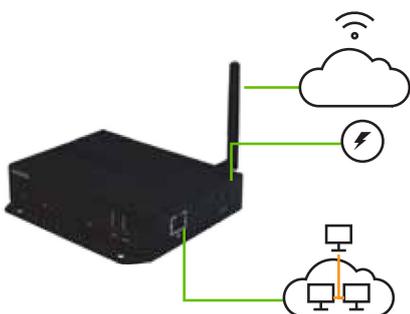


Minimal Maintenance

The robust XMP-6250 is designed for 24/7 usage with self-recovery mechanism and a fanless cooling system for minimal maintenance and maximum running time.

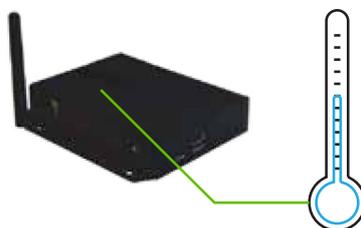

Easy and Flexible Usability

So much power is packed into such a small form factor. The XMP-6250 content management is centralized and remote. You can control playback schedule as well as turn on and off display all at your fingertips.

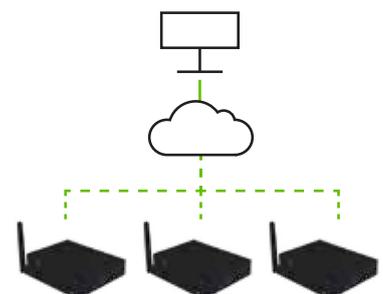

Technical Specification

Open Standards Supported

- HTML5, JavaScript, and CSS
- Android API
- W3C SMIL for cross-platform management
- W3C Widgets for HTML delivery
- POPAI Digital Signage Content Standards, including:
 - S1 (JPEG 480p baseline)
 - S2 (JPEG 720p baseline)
 - S4 (MPEG L2 audio)
 - S5 (MP3 audio, 384Kbps)
 - S6 (MPEG-1 SIF, 3Mbps CBR)
 - S7 (MPEG-1 480p, 10Mbps CBR)
 - S8 (MPEG-1 720p, 15Mbps CBR)
 - S9 (MPEG-2 480p, 6Mbps CBR)
 - S10 (MPEG-2 720p, 12Mbps CBR)
 - S11 (H.264/MPEG-4 AVC, 480p, 6Mbps CBR)
 - S12 (H.264/MPEG-4 AVC, 720p, 10Mbps CBR)
 - E1 (PNG 24bpp+alpha, 480p)
 - E2 (PNG 24bpp+alpha, 720p)
 - E4 (VC-1/WMV9, MP@ML, 720p)
 - E7 (MPEG-4 ASP, 480p, 10Mbps CBR)
 - E8 (H.264/MPEG-4 AVC, 1080p, 20Mbps CBR)

Advanced Signage Features

- Remote commissioning
- AlwaysOn, AppLock to prevent unauthorized access
- StrongCache for continued playback even when network is not available

HTML5 Support

- Widgets for calendar, clock, news, weather, and web page integration
- HTML5 technologies including CSS and Javascript
- WebKit-based browser engine, same as Google Chrome™ and Apple Safari® browsers

Digital Signage Features

- Multi-zone screen layout, transparent PNG overlay, and graphical scrolling ticker
- Auto-play starts playing scheduled contents automatically when power is re-established
- Automatic error recovery with built-in WDT
- Real-time clock with backup clock battery

Content Management

- SignApps Express Utility
- 3rd party solution (optional license)

Connectivity

- Wireless: 802.11 b/g/n
- HDMI 1.4 (Full-HD 1080p with audio)
- Ethernet 10/100 BASE-T
- 3.5mm analog stereo audio out
- S/PDIF out
- USB 2.0 x 2
- Micro USB for ADB
- Optional 3G/4G mobile module via USB

Local Storage

- 8 GB eMMC built-in (approx. 360 minutes of typical 720p video @3 Mbps)
- Micro SD card slot (support up to 32GB storage)

Mounting Kit

- Built-in wall mount bracket

Supplied Accessories

- HDMI cable
- External 2dB Wireless antenna
- Velcro
- Power/Micro SD card brackets

Expansion Options

- 16GB/32GB micro SD/SDHC memory card

AC Adapter

- Input: 100-240V, 50-60 Hz, 0.5A Max.
- Output: 12V, 1.5A
- UL/CB/PSE certified power supplies
- Interchangeable connector system includes US plugs (Option for EU, UK and AUS plugs)

Environmental

- Operating temperature: -20 to 50°C / -4 to 122°F
- Humidity: 10 to 85% @ 45°C(113°F), non-condensing
- Shock: IEC 60068-2-27 Table A.1 (railway related)
- Vibration: 1.5G @ 5-200Hz, random

Dimensions for Product and Package

- Size: 138.60mm x 128.10mm x 30.20mm / 5.45" x 5.04" x 1.19"
- System Weight: 334.2g / 0.74 lb.
- Individual Package Size: 226mm x 172mm x 89 mm / 8.89" x 6.77" x 3.5"
- Total Product Box Weight: 841.5g / 1.85lbs.
- Outer Carton Size: 482mm x 390mm x 245mm / 18.97" x 15.35" x 9.64"
- Units per Outer Carton: 10
- Total Carton Weight (10 units): 9498.2g / 20.94 lb

Certifications

- CE/FCC/IC

Warranty

- 1-year limited parts & labor

Endorsement

"The IAdea XMP-6250 is a versatile, industrial media player which is suitable for a broad range of applications requiring HD playback. As well as supporting several interfaces, such as WiFi and USB for flexible deployment, it can be remotely managed using IAdea's device management SignApps software. Additionally, it supports third party content management systems, providing further flexibility and scalability. It has been a hugely popular device for us, across a broad range of verticals including retail, healthcare and hospitality."

– Jade Harris, Senior Account Manager, Westbase Technology
IAdea UK distributor

"The IAdea, XMP-6250 has proven to be robust, commercial grade, solid state media player. Effortlessly setup every time i.e.... Set and forget. Recently launched into the Australian market, we have nothing but praise for the entire team at IAdea for their knowledge and fast product support."

– Michael Rudolph, Managing Director, Quantum Sphere
IAdea AUZ distributor

Sprechen Sie uns an!

digitalSIGNAGE.de GmbH
Geschäftsführer:
Dipl.-Kfm. Björn Christiansen

Winterhuder Weg 78a
22085 Hamburg

+49 40 180 241 080

office@digitalsignage.de
<https://www.iadea.info/>